
The fastest, most efficient, and reliable way of "taming" your food costs.

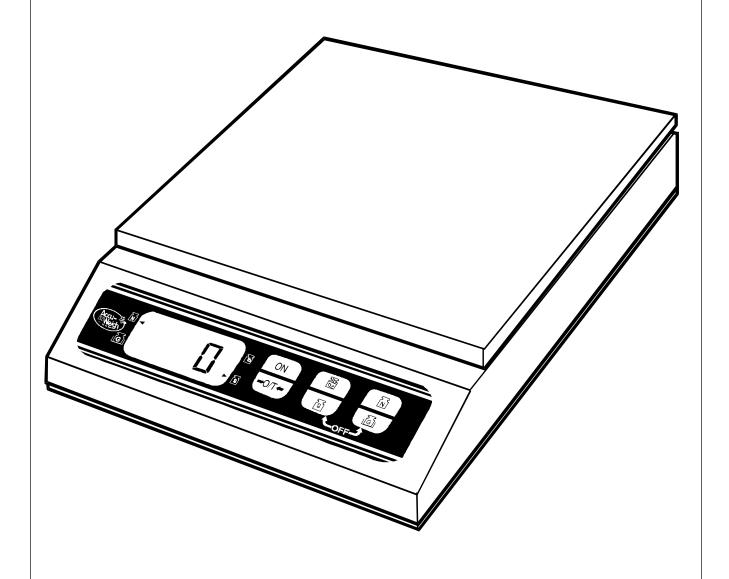

Yamato

SPC Series

Digital Scale

Electronic features

Microprocessor based, the circuitry and software of these fine scales provide an array of valuable functions, ALL STANDARD:

- · Semi-automatic Zero Reset
- · Zero tracking
- Motion Detection
- · Choice of units of weight
- · Display of Net or Gross weight
- Low battery indication
- · Automatic off function

Convenient battery or A/C Adapter operations

When used with 6 AA size batteries, the scale can be utilized anywhere. When the display value has not changed for 2 minutes, the scale is electronically "turned off" to prolong the life of the batteries. The A/C adapter provides complete flexibility of use.

Real load cell performance

All models are equipped with a strain gauge load cell that provides the best possible accuracy, repeatability and linearity.

Quality construction

with industrial quality components throughout to guarantee trouble-free operation under demanding conditions. The sturdy stainless steel housing and tactile keyboard are splash proof and USDA accepted.


Easy to read

The large (0.55") LCD display is easy to read under any lighting condition, whether standing up or sitting down. Weights are displayed within a fraction of a second.

Tactile keyboard


The keyboard has three tactile keys that are used to reset the scale to zero (or enter a tare value), change the unit of weight and to turn power on and off.

Dimensions



Flexible

The SPC series scale is constructed A "dual-range" system used in these scales permits fine weight readings in increments as small as 1 g and 0.1 lb. Switch between Ib and g at the push of a button. Switch between fractional lb, decimal lb and decimal ounce settings at the flip of a switch.

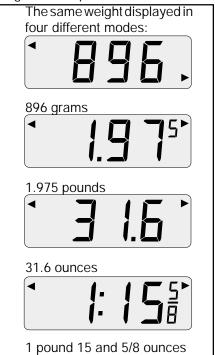

Specifications

MODEL	SPC-2000		SPC-5000	
CAPACITY	4.5 lb / 2000 g		11 lb / 5000 g	
DIVISION	Low Range	High Range	Low Range	High Range
GRAM	0-1000 g x 2 g	1000 - 2000 g x 5 g	0 - 2500 g x 5 g	2500 - 5000 g x 10 g
DECIMAL LB	0 - 2.2 lb x 0.005 lb	2.2 - 4.5 lb x 0.01 lb	0 - 5.52 lb x 0.01 lb	5.52 - 11.2 lb x 0.02 lb
DECIMAL OZ	0 - 35 oz x 0.1 oz	35 - 72 oz x 0.2 oz	0 - 88 oz x 0.2 oz	88 - 179 oz x 0.5 oz
LB / FRACTIONAL OZ	0 - 2 lb 4 oz x 1/8 oz	2 lb 4 oz - 4 lb 8 oz x 1/4 oz	0 - 5 lb 8 oz x 1/4 oz	5 lb 8 oz x 11 lb 3 oz x 1/2 oz
DISPLAY	0.55"(14 mm) LCD with 4 digits			
OPERATING TEMPERATURE	32°F to 104°F (0°C to 40°C)			
TARING RANGE	Full Scale			
POWER SOURCE	6 AA batteries or AC adapter			



YAMATO CORPORATION

1775 S. Murray Blvd. Colorado Springs, CO 80916 USA Tel (719) 591-1500 Fax (719) 591-1045 YAMATO TECH CORPORATION #112-19425 Langley By-Pass Surrey, B.C. V3S 6K1 Canada Tel (604) 533-2338 Fax (604) 533-0827